

ERRATA

Yue Wang · Kazuya Minato · Ikuho Iida

Mechanical properties of wood in an unstable state due to temperature changes, and analysis of the relevant mechanism III: effect of quenching on stress relaxation of chemically modified woods

Published online: March 3, 2007

Errors appear in the next-to-last sentence of the second paragraph in the subsection “Acetylation and formaldehyde treatment” in “Materials and methods.” The sentence should read as follows: “The values of WG for formaldehyde-treated wood were 0.59%–5.42% and those for acetylated wood were 16.7%–24.5%.”

In addition, an incorrect version of Fig. 2 was published. The correct figure appears here.

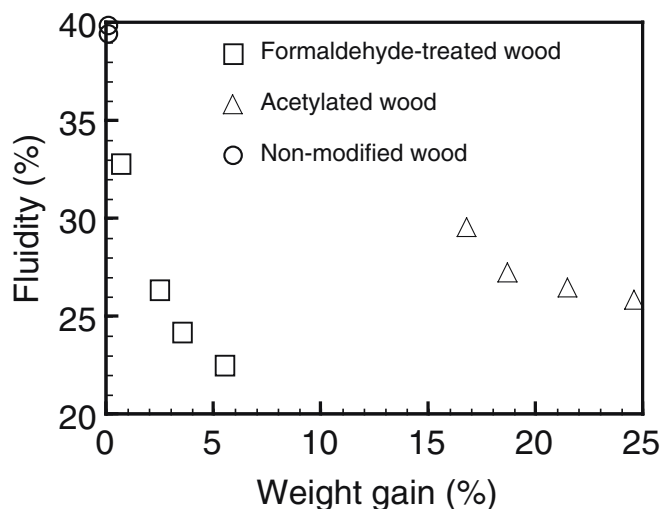


Fig. 2. Effect of chemical modifications on fluidity of quenched wood

The online version of the original article can be found at
<http://dx.doi.org/10.1007/s10086-006-0831-2>

Y. Wang · K. Minato · I. Iida (✉)
Research Division of Agriculture, Graduate School of Kyoto
Prefectural University, Kyoto 606-8522, Japan
Tel. +81-75-703-5639; Fax +81-75-703-5639
e-mail: i_iida@kpu.ac.jp